

Batteriekontakt / Battery Probe - UEBK-10741

Material (Material)

Kolben: Kupfer-Beryllium, vergoldet
(Plunger: Copper-Beryllium, gold plated)

Stifthülse: Nickel-Silber, vergoldet
(Barrel: Nickel-Silver, gold plated)

Feder: Edelstahl
(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 3 A
(Rated current: 3 A)

Kontaktwiderstand: < 30 mΩ
(Contact resistance: < 30 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 1,91 mm
(Minimum Centers: 1,91 mm)


Max. Hub: 1,52 mm
(Max. travel: 1,52 mm)

Empfohlener Hub: 1,27 mm
(Recommended travel: 1,27 mm)


Federkraft: 1,08 N bei Empfohlenem Hub
(Spring Force: 1,08 N @ recommended travel)

Bestellinformation (Order information)

Art. Nr.: UEBK-10741
(Art. No.: UEBK-10741)

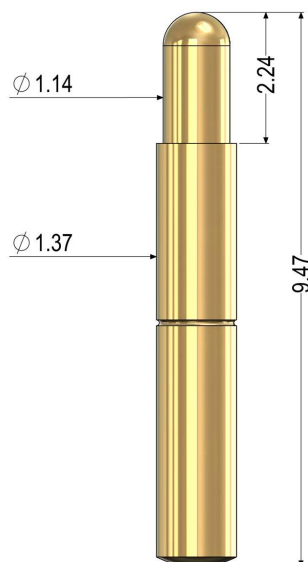

RECOMMENDED FOOTPRINT



Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)