

Batteriekontakt / Battery Probe - UEBK-12891

Material (Material)

Kolben: Messing, vergoldet

(Plunger: Brass, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 5 A

(Rated current: 5 A)

Kontaktwiderstand: < 50 mΩ

(Contact resistance: < 50 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 2,54 mm

(Minimum Centers: 2,54 mm)

Max. Hub: 3,2 mm

(Max. travel: 3,2 mm)

Empfohlener Hub: 3,0 mm

(Recommended travel: 3,0 mm)

Federkraft: 2 N bei Empfohlenem Hub


(Spring Force: 2 N @ recommended travel)

Bestellinformation (Order information)


Art. Nr.: UEBK-12891

(Art. No.: UEBK-12891)

3

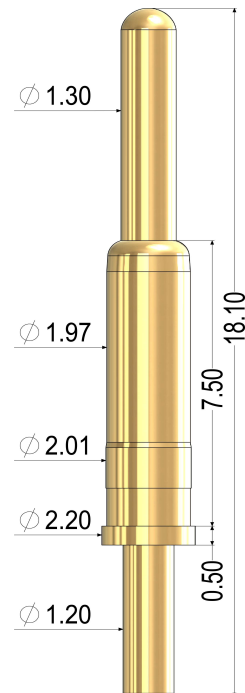

RECOMMENDED FOOTPRINT



Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)