

## Batteriekontakt / Battery Probe - UEBK-12971

### Material (Material)

Kolben: Messing, vergoldet

*(Plunger: Brass, gold plated)*

Stifthülse: Messing, vergoldet

*(Barrel: Brass, gold plated)*

Feder: Edelstahl

*(Spring: Stainless Steel)*

### Elektrische Spezifikation (Electrical specification)

Nennstrom: 1A

*(Rated current: 1A)*

Kontaktwiderstand: < 100 mΩ

*(Contact resistance: < 100 mΩ)*

### Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 1,91 mm

*(Minimum Centers: 1,91 mm)*

Max. Hub: 2,3 mm

*(Max. travel: 2,3 mm)*

Empfohlener Hub: 2,0 mm

*(Recommended travel: 2,0 mm)*


Federkraft: 0,8 N bei Empfohlenem Hub

*(Spring Force: 0,8 N @ recommended travel)*


### Bestellinformation (Order information)

Art. Nr.: UEBK-12971

*(Art. No.: UEBK-12971)*

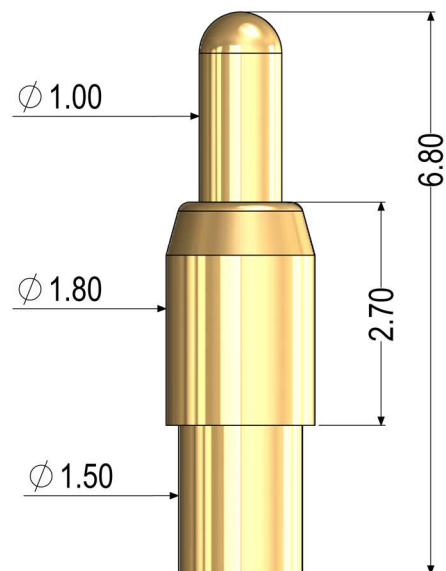

### RECOMMENDED FOOTPRINT

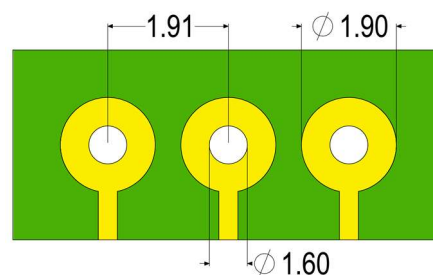

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)