

## Batteriekontakt / Battery Probe - UEBK-12972

### Material (Material)

Kolben: Messing, vergoldet

*(Plunger: Brass, gold plated)*

Stifthülse: Messing, vergoldet

*(Barrel: Brass, gold plated)*

Feder: Edelstahl

*(Spring: Stainless Steel)*

### Elektrische Spezifikation (Electrical specification)

Nennstrom: 1 A

*(Rated current: 1 A)*

Kontaktwiderstand: < 50 mΩ

*(Contact resistance: < 50 mΩ)*

### Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 2,54 mm

*(Minimum Centers: 2,54 mm)*

Max. Hub: 1,3 mm

*(Max. travel: 1,3 mm)*

Empfohlener Hub: 1,0 mm

*(Recommended travel: 1,0 mm)*


Federkraft: 1,3 N bei Empfohlenem Hub

*(Spring Force: 1,3 N @ recommended travel)*


### Bestellinformation (Order information)

Art. Nr.: UEBK-12972

*(Art. No.: UEBK-12972)*

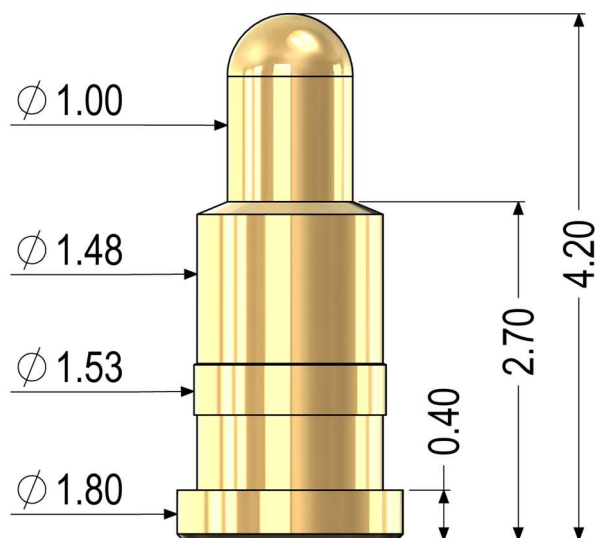

### RECOMMENDED FOOTPRINT

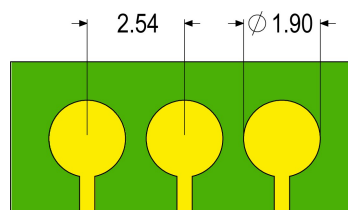

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)