

Batteriekontakt / Battery Probe - UEBK-30305

Material (Material)

Kolben: Messing, vergoldet

(Plunger: Brass, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 1 A

(Rated current: 1 A)

Kontaktwiderstand: < 50 mΩ

(Contact resistance: < 50 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 3,00 mm

(Minimum Centers: 3,00 mm)

Max. Hub: 2,65 mm

(Max. travel: 2,65 mm)

Empfohlener Hub: 2,05 mm

(Recommended travel: 2,05 mm)


Federkraft: 0,45 N bei Empfohlenem Hub

(Spring Force: 0,45 N @ recommended travel)


Bestellinformation (Order information)

Art. Nr.: UEBK-30305

(Art. No.: UEBK-30305)

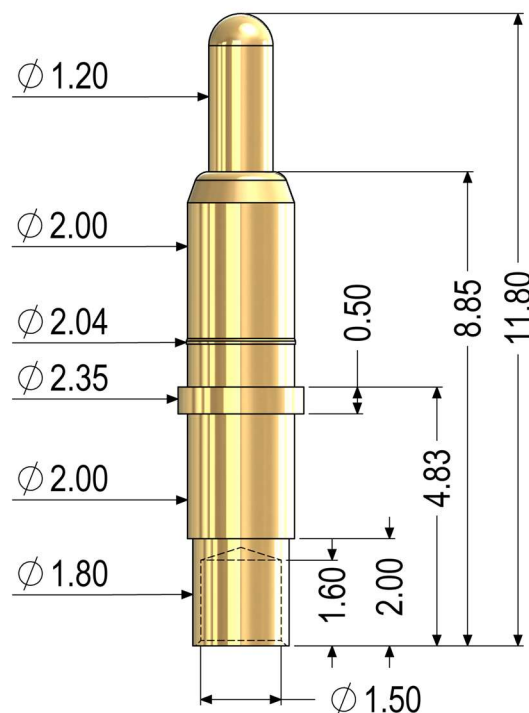

RECOMMENDED FOOTPRINT

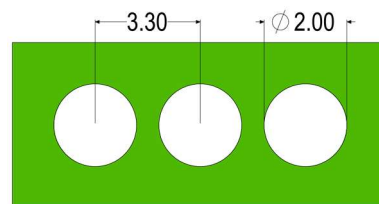

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)