

Federkontakt / Spring Contact – UEFK-G030

Material (Material)

Kolben: gehärteter Stahl, Palladium beschichtet über Nickel

(optional: Gold beschichtet über Nickel)

(Plunger: Hardened Steel, Palladium plated over Nickel (optional: Gold plated over Nickel))

Stifthülse: Phosphor Bronze, Gold beschichtet

(Barrel: Phosphor Bronze, Gold plated)

Feder: Federstahl

(Spring: Music wire)

Beschichtung der Hülse: Gold beschichtet

(Plating of Receptacle: Gold plated)

Hülse: Phosphor-Bronze / Messing

(Receptacle: Phosphor-Bronze / Brass)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 0,5 A

(Rated current: 0,5 A)

Kontaktwiderstand: < 150 mΩ

(Contact resistance: < 150 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 0,55 mm

(Minimum Centers: 0,55 mm)

Max Hub: 2,0 mm

(Max. travel: 2,0 mm)

Empfohlener Hub: 1,5 mm

(Recommended travel: 1,5 mm)

Federkraft: 27 g bei Nennfederweglänge

(Spring Force: 27 g @ working height)

Federvorspannung: 11 g

(Preload force: 11 g)


Anschluss: No Term. (G030TW) / Preattached Wire (G030SW)

(Connection: No Term. (G030TW) / Preattached Wire (G030SW))

Bestellinformation (Order information)

Federkontakt *(Spring Contact)* Art No.: UEFK-G030-A / -AM

Hülse *(Receptacle)* Art No.: UEFK-G030-TW / -SW

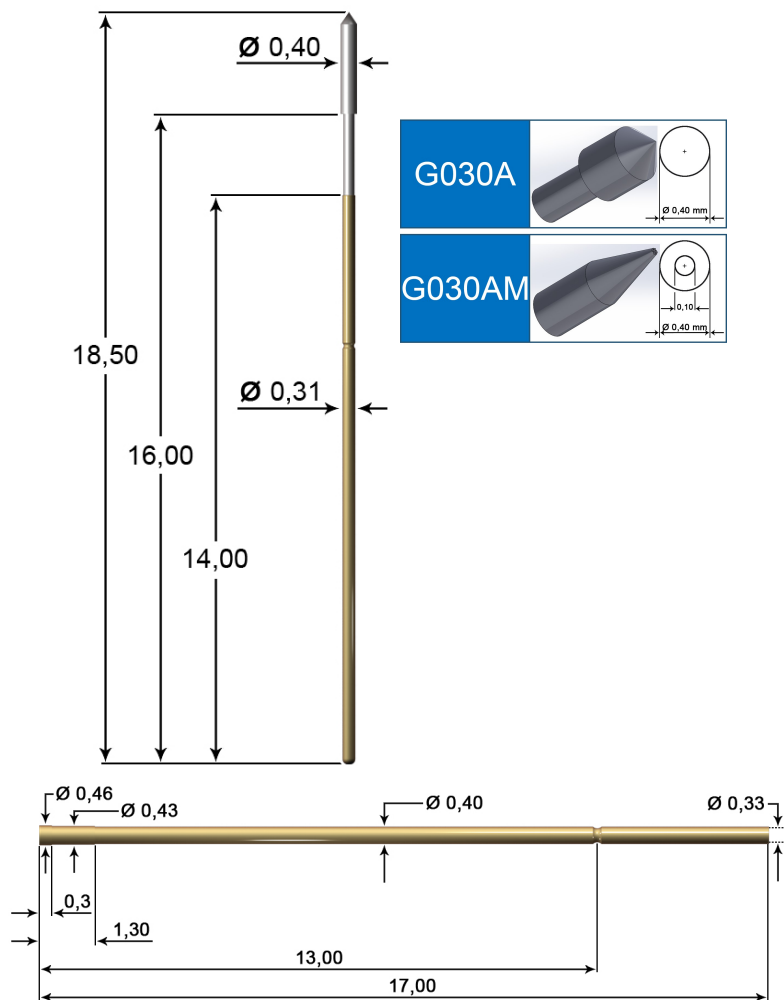

Mounting Hole Size: ~0,42 mm

G030TW - No Termination Receptacle



G030SW - Preattached Wire Receptacle



Wire AWG 30



Manufactured by **LEENO**

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter [mm] / Specifications subject to change without notice. Dimensions in Millimeter [mm]