



Temperaturmanagement

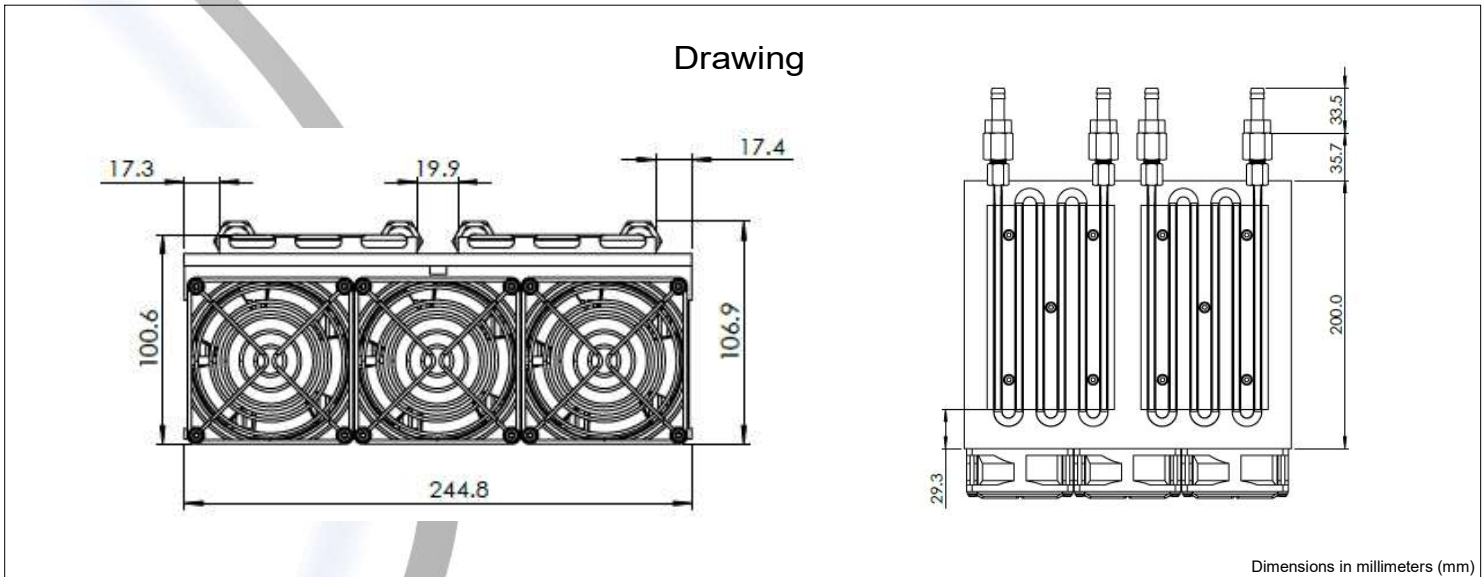

Liquid-to-Air cooling unit 200W

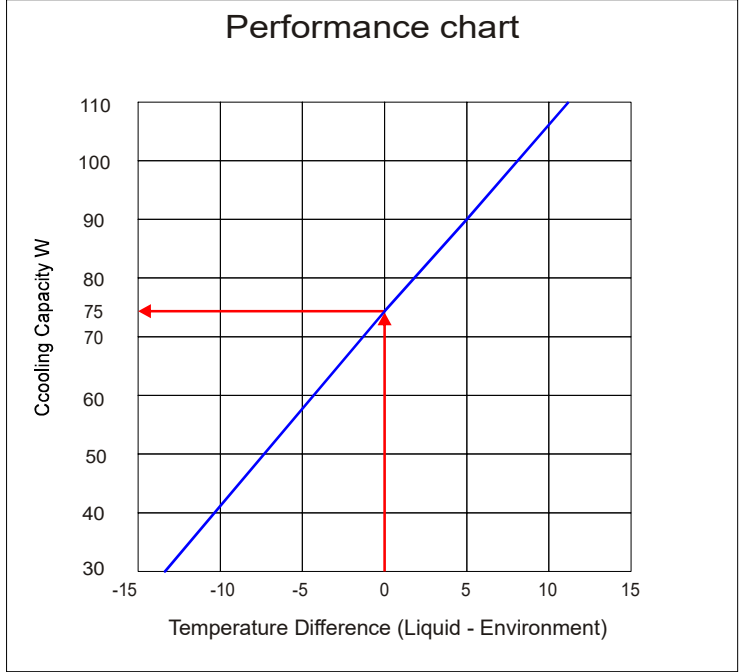

Standard version	
max. power consumption (W $\pm 10\%$)	200
operating power consumption (W nom. $\pm 10\%$)	185
cooling capacity at $dT=0^\circ\text{C}$ (W nom. $\pm 10\%$)	200
operating current (A max. $\pm 10\%$) at 24VDC	7,3
dimensions (L x W x H, $\pm 0,5\text{mm}$)	306x245x100
weight (kg)	6,5
operating temperature range ($^\circ\text{C}$ min / max)	-10 / +70
electrical power per fan (W)	9,6
airflow per fan (m^3/h)	143
volume per fan (dBA)	55

version / ordering	
UEPK-L2AH-24V-200W	42578

Notes:

!!! Fittings for tube diameter 9mm

Free space without insulation drops performance and rises minimum temperature on cold side.

Customized solutions are available upon request!