

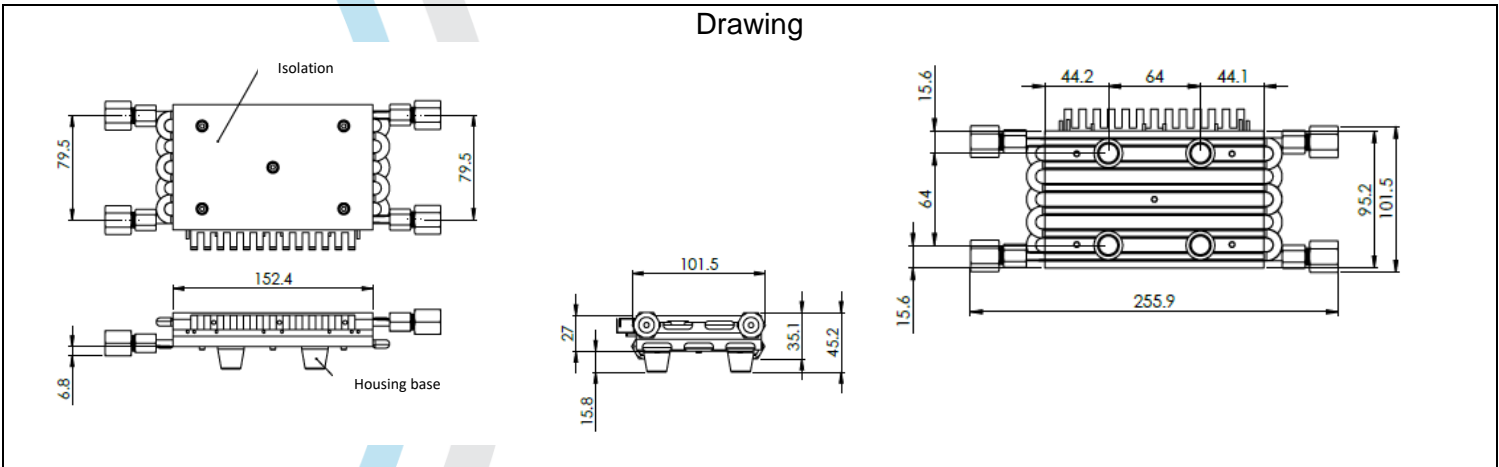


Temperaturmanagement

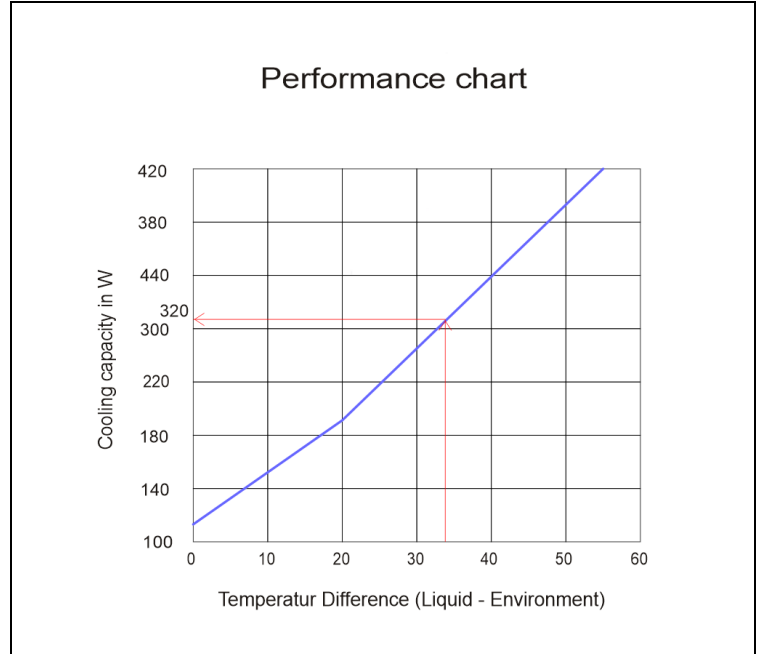

Liquid to Liquid cooling unit 320W

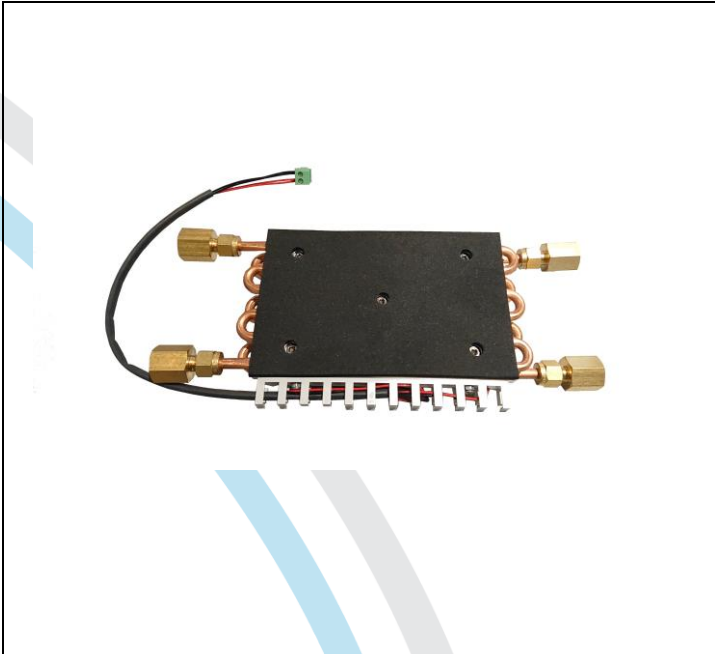

	Standard version
max. power consumption (W ±10%)	305
operating power consumption (W nom. ±10%)	290
cooling capacity at dT=15°C (W nom. ±10%)	135
operating current (A max. ±10%) bei 24VDC	304
protection class DIN EN 60529	IP 65
operating temperatur range (°C min / max.)	-30 / +80
dimensions (L x B x H, ±0,5 mm)	256x45,2x119
pressure bar	10
weight (kg)	1,1

Version / ordering	
UEPK-L2LH-24V-320W	42730

Note:
 Connection with G ¼ inch thread,
 (cutting ring screw connection brass on copper pipe)

Customized solutions are available upon request.

