

Batteriekontakt / Battery Probe - UEBK-12193

Material (Material)

Kolben: Kupfer-Beryllium, vergoldet

(Plunger: Copper-Beryllium, gold plated)

Stifthülse: Nickel-Silber, vergoldet

(Barrel: Nickel-Silver, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 15 A

(Rated current: 15 A)

Kontaktwiderstand: < 6 mΩ

(Contact resistance: < 6 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 2,54 mm

(Minimum Centers: 2,54 mm)

Max. Hub: 2,54 mm

(Max. travel: 2,54 mm)

Empfohlener Hub: 1,70 mm

(Recommended travel: 1,70 mm)


Federkraft: 0,74 N bei Empfohlenem Hub

(Spring Force: 0,74 N @ recommended travel)


Bestellinformation (Order information)

Art. Nr.: UEBK-12193

(Art. No.: UEBK-12193)

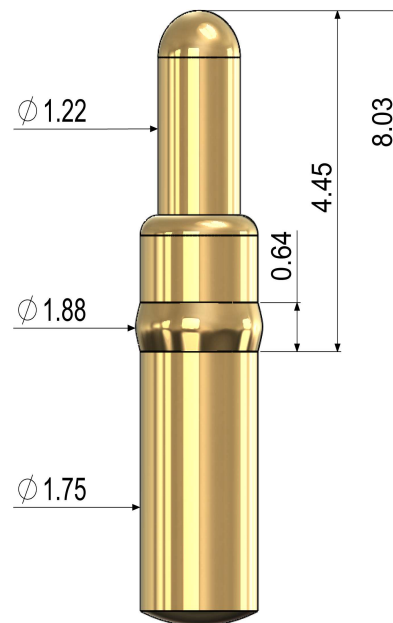

RECOMMENDED FOOTPRINT

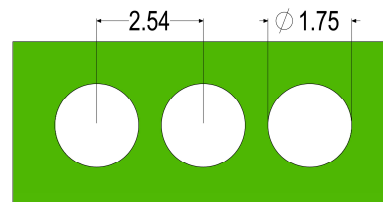

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)