

Batteriekontakt / Battery Probe - UEBK-12770

Material (Material)

Kolben: Messing, vergoldet

(Plunger: Brass, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Edelstahl

(Spring: Stainless steel)

Beschichtung: Nickel, vergoldet

(Plating: Au over Ni)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 1 A

(Rated current: 1 A)

Kontaktwiderstand: < 100 mΩ

(Contact resistance: < 100 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 1,91 mm

(Minimum Centers: 1,91mm)

Max Hub: 0,725 mm

(Max. travel: 0,725 mm)

empfohlener Hub: 0,125 mm

(Recommended travel: 0,125 mm)

Federkraft: 0,3 N bei Nennfederweglänge

(Spring Force: 0,3 N @ working height)


Anschluss: SMD

(Connection: SMD)


Bestellinformation (Order information)

Art.Nr.: UEBK - 12770



(Art No.: UEBK - 12770)

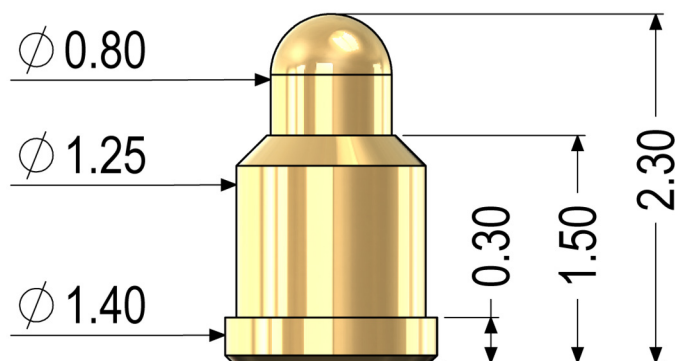

RECOMMENDED FOOTPRINT

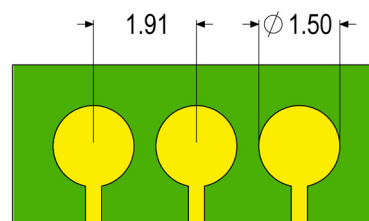

Batteriekontakt / Battery Probe - UEBK-12770-Tape / Reel

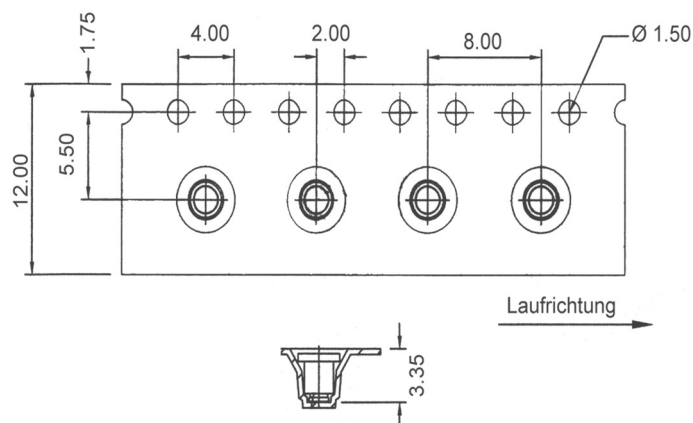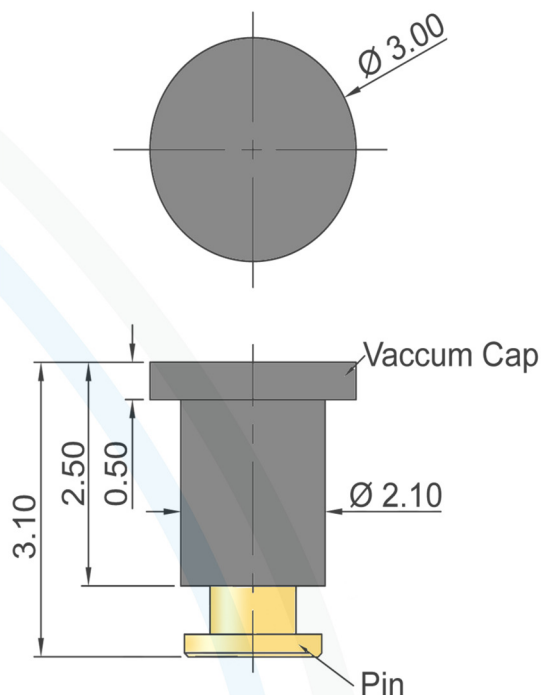

Mechanische Spezifikation (Mechanical specification)

Empfohlenes Bestückungsuntermaß: 3,4 mm

(Recomenend undersize for mounting: 3,4 mm)

Stückzahl: 2000 je Gurt / Rolle

(Quantity: 2000 @ Tape / Reel)

Bestellinformation (Order information)

Art.Nr.: UEBK - 12840

(Art No.: UEBK - 12840)