

Battery Probes

Pad Connector UEBK-12774

→ [Spring Load-Connector UEBK 12775](#)

Material

Frame: HTN (UL94V-0)

Pin: Brass


Plating: Au over Ni

Electrical Specification

Rated Current: 1A

Mechanical Specification

Height: 8,5 mm

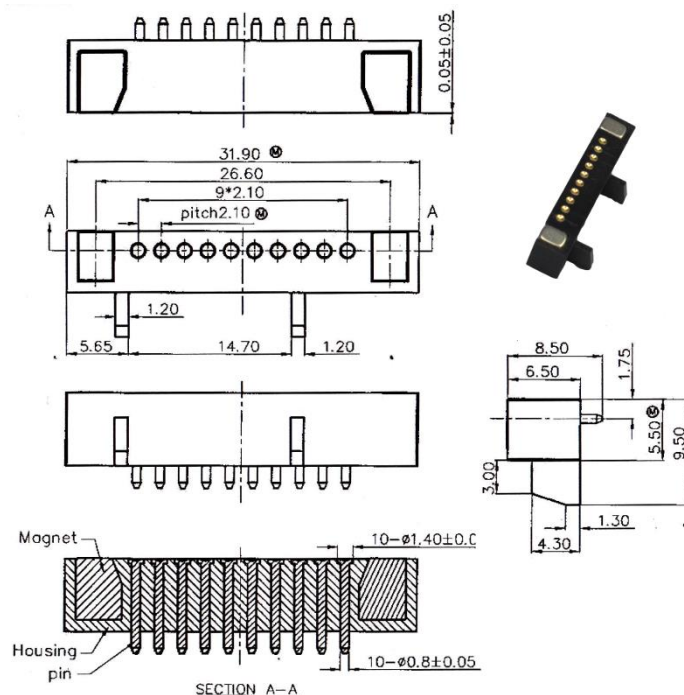

Specifications subject to change without notice. Dimensions in Millimeter (mm)

Battery Probes

Spring load-Connector UEBK-12775

→ [Pad - Connector UEBK 12774](#)

Material



Frame: HTN UL94V-0

Plunger: Brass

Barrel: Brass

Spring: Stainless Steel

Plating: Au over Ni

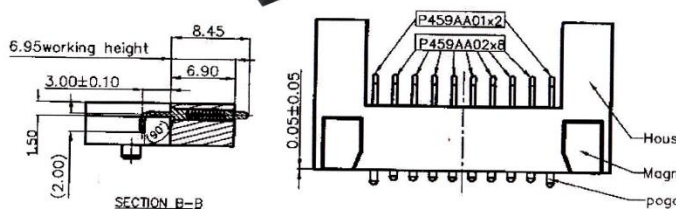


Electrical Specification

Rated Current: 1A

Contact Resistance:

50 mΩ max. at Working Height

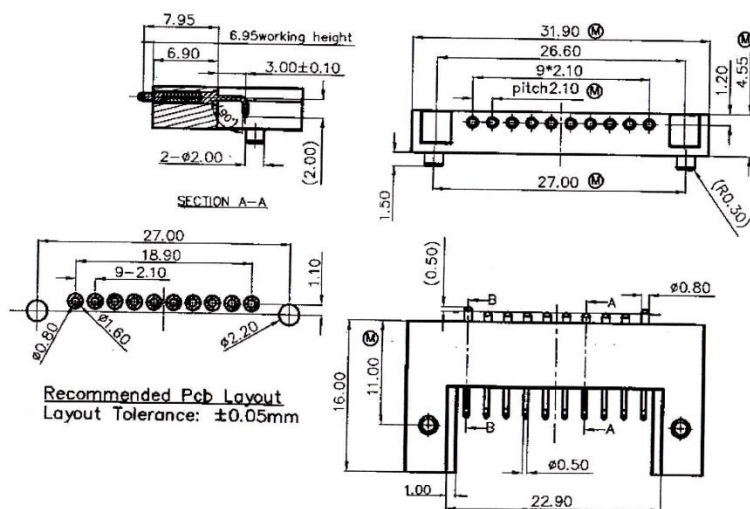

Mechanical Specification

(a) Unloaded Height: 11,0 mm

Working Height: 10,0 mm

(b) Unloaded Height: 11,4 mm

Working Height: 9,9 mm

Spring Force:

0,8 – 0,9 N at Working Height

Specifications subject to change without notice. Dimensions in Millimeter (mm)