

# Battery Probes

## Spring load Connector UEBK-12776

→ [Pad-Connector UEBK 12777](#)

### Material

Frame: HTN (UL94V-0)

Plunger: Brass

Barrel: Brass

Spring: Stainless steel

Plating: Au over Ni

### Electrical Specification

Rated Current: 1A

Contact Resistance:

50 mΩ max. at 1,10 mm stroke

### Mechanical Specification

Full Stroke: 1,2 mm


Spring Force:

0,4N at working height

Dual Magnet-Connector (ref. picture)

Total length: 8,0 mm

Working height: 6,9 mm

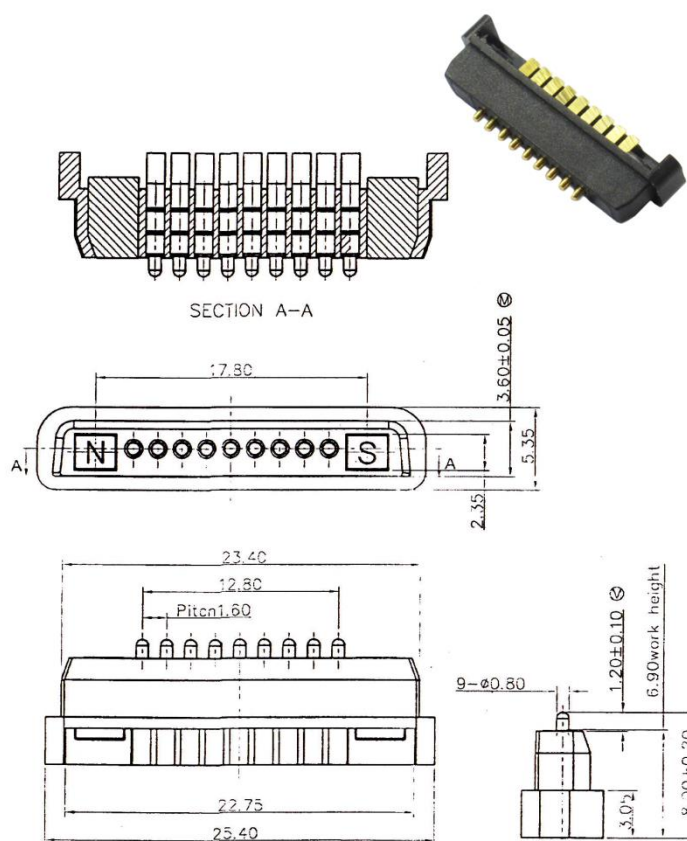

Specifications subject to change without notice. Dimensions in Millimeter (mm)

# Battery Probes

## Pad-Connector UEBK-12777

→ [Spring load Connector UEBK 12776](#)

### Material

Pin: Brass 3601

Plating: UL94V-0

### Electrical Specification


### Mechanical Specification

Pin Height: 3 mm

Head Dia: 1,7 mm

Pin Dia: 0,6mm

Dual Magnet-Connector (ref. picture)

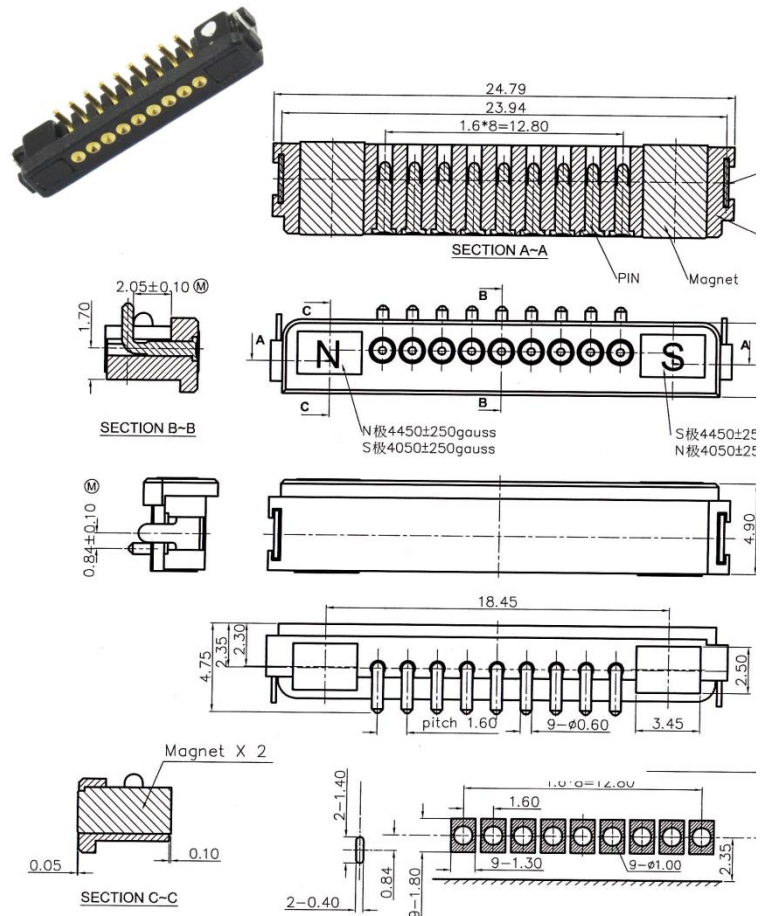

Specifications subject to change without notice. Dimensions in Millimeter (mm)