

Batteriekontakt / Battery Probe - UEBK-12863

Material (Material)

Gehäuse: Schwarz HTN (UL94V-0)

(Housing: Black HTN UL94V-0)

Kolben: Messing, vergoldet

(Plunger: Brass, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 1 A

(Rated Current: 1 A)

Kontaktwiderstand: < 50 mΩ

(Contact Resistance: < 50 mΩ)

Mechanische Spezifikation (Mechanical specification)

Kontakte: 2

(No. of contacts: 2)

Max. Hub: 1,5 mm

(Max. travel: 1,5 mm)

Empfohlener Hub: 1,0 mm

(Recommended travel: 1,0 mm)

Federkraft: 1,1 N bei Empfohlenem Hub

(Spring Force: 1,1 N @ recommended travel)






Anschluss: SMD

(Connection: SMD)


Bestellinformation (Order Information)

Art. Nr. (Art. No.):

UEBK-12863

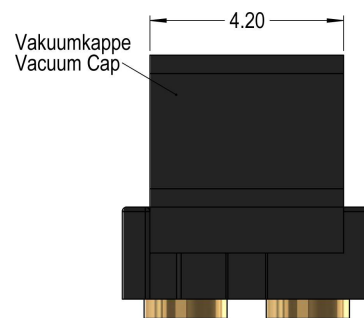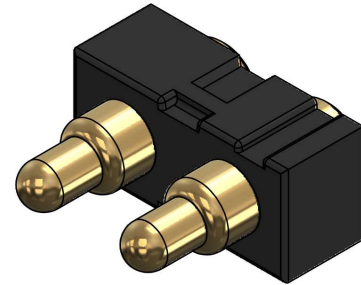

Batteriekontakt / Battery Probe - UEBK-12863-Tape / Reel

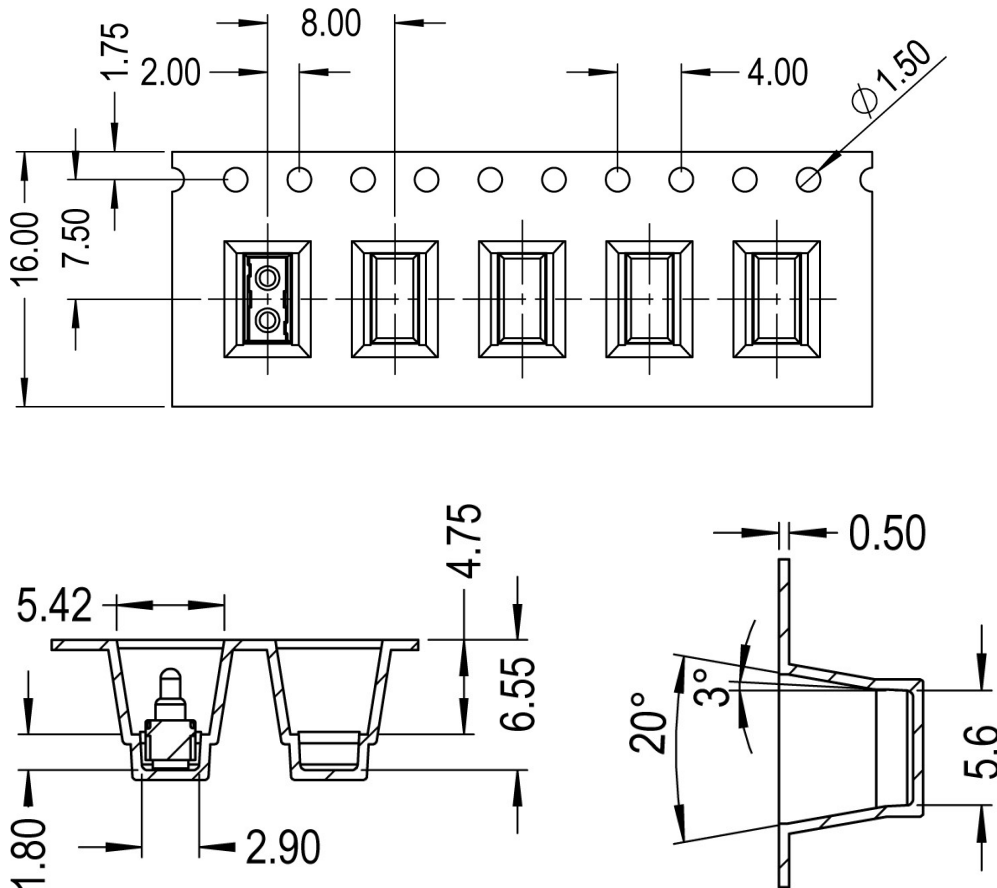

Mechanische Spezifikation (Mechanical specification)

Mindestbestückungsabstand: 5,0 mm

(Minimum mounting pitch: 5,0 mm)

Stückzahl: 1300 je Rolle

(Quantity: 1300 per Reel)

Bestellinformation (Order information)

Art. Nr.: UEBK-13274

(Art. No.: UEBK-13274)