

Batteriekontakt / Battery Probe - UEBK-12899

Material (Material)

Kolben: Messing, vergoldet

(Plunger: Brass, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 1A

(Rated current: 1A)

Kontaktwiderstand: 50 mΩ

(Contact resistance: 50mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 1,91 mm

(Minimum Centers: 1,91 mm)

Max. Hub: 1,7 mm

(Max. travel: 1,7 mm)

Empfohlener Hub: 1,0 mm

(Recommended travel: 1,0 mm)


Federkraft: 1 N bei Empfohlenem Hub

(Spring Force: 1 N @ recommended travel)


Bestellinformation (Order information)

Art. Nr.: UEBK-12899

(Art. No.: UEBK-12899)

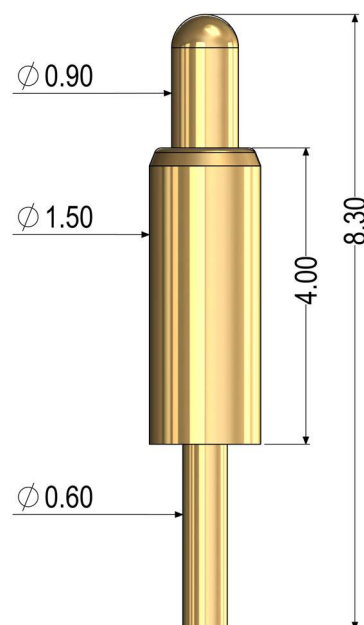

RECOMMENDED FOOTPRINT



Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)