

Batteriekontakt / Battery Probe - UEBK-13655

Material (Material)

Kolben: Messing, vergoldet

(Plunger: Brass, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 1 A

(Rated current: 1 A)

Kontaktwiderstand: < 50 mΩ

(Contact resistance: < 50 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 2,54 mm

(Minimum Centers: 2,54 mm)

Max. Hub: 0,85 mm

(Max. travel: 0,85 mm)

Empfohlener Hub: 0,60 mm

(Recommended travel: 0,60 mm)


Federkraft: 0,6 N bei Empfohlenem Hub

(Spring Force: 0,6 N @ recommended travel)

Bestellinformation (Order information)

Art. Nr.: UEBK-13655

(Art. No.: UEBK-13655)

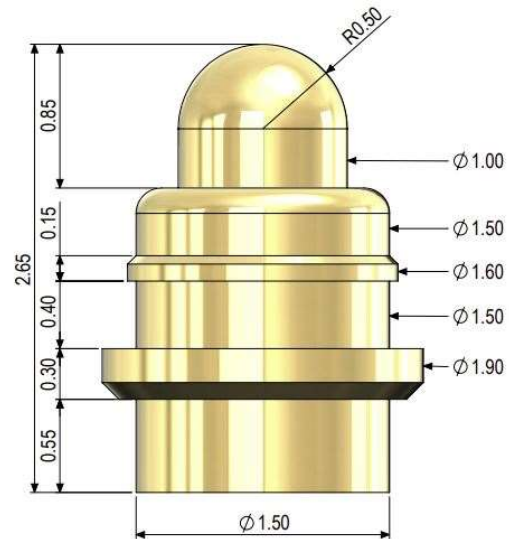

RECOMMENDED FOOTPRINT

