

## Batteriekontakt / Battery Probe - UEBK-13662

### Material (Material)

Kolben: Messing, vergoldet

*(Plunger: Brass, gold plated)*

Stifthülse: Messing, vergoldet

*(Barrel: Brass, gold plated)*

Feder: Edelstahl

*(Spring: Stainless Steel)*

### Elektrische Spezifikation (Electrical specification)

Nennstrom: 2 A

*(Rated current: 2 A)*

Kontaktwiderstand: < 50 mΩ

*(Contact resistance: < 50 mΩ)*

### Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 4,45 mm

*(Minimum Centers: 4,45 mm)*

Max. Hub: 1,20 mm

*(Max. travel: 1,20 mm)*

Empfohlener Hub: 1,00 mm

*(Recommended travel: 1,00 mm)*


Federkraft: 0,9 N bei Empfohlenem Hub

*(Spring Force: 0,9 N @ recommended travel)*

### Bestellinformation (Order information)

Art. Nr.: UEBK-13662

*(Art. No.: UEBK-13662)*

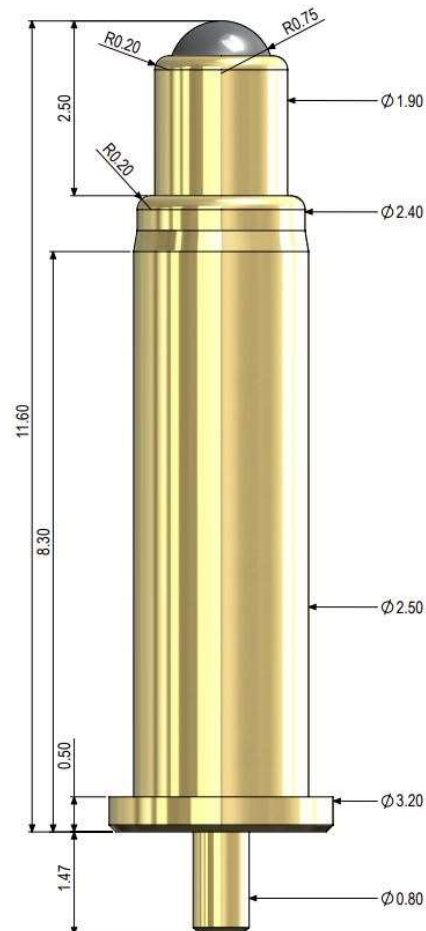

### RECOMMENDED FOOTPRINT

