

Batteriekontakt / Battery Probe - UEBK-20342

Material (Material)

Kolben: Kupfer-Beryllium, vergoldet
(Plunger: Copper-Beryllium, gold plated)
Stifthülse: Nickel-Silber, vergoldet
(Barrel: Nickel-Silver, gold plated)
Feder: Edelstahl
(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)


Nennstrom: 5 A
(Rated current: 5 A)
Kontaktwiderstand: < 30 mΩ
(Contact resistance: < 30 mΩ)

Mechanische Spezifikation (Mechanical specification)


Minimum Raster: 1,00 mm
(Minimum Centers: 1,00 mm)
Max. Hub: 1,45 mm
(Max. travel: 1,45 mm)
Empfohlener Hub: 0,76 mm
(Recommended travel: 0,76 mm)
Federkraft: 1,05 N bei Empfohlenem Hub
(Spring Force: 1,05 N @ recommended travel)

Bestellinformation (Order information)

Art. Nr.: UEBK-20342
(Art. No.: UEBK-20342)

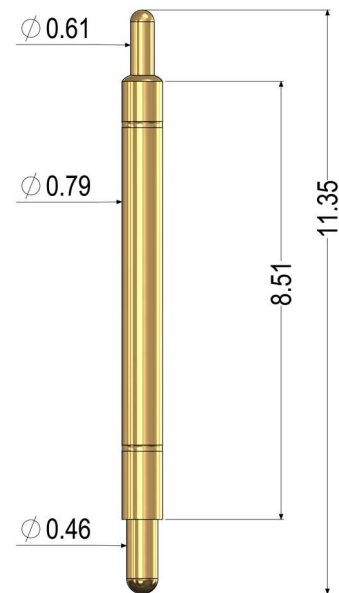

RECOMMENDED FOOTPRINT



Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)