

Batteriekontakt / Battery Probe - UEBK-30306

Material (Material)

Kolben: Messing, vergoldet

(Plunger: Brass, gold plated)

Stifthülse: Messing, vergoldet

(Barrel: Brass, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 6 A

(Rated current: 6 A)

Kontaktwiderstand: < 50 mΩ

(Contact resistance: < 50 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 6,7 mm

(Minimum Centers: 6,7 mm)

Max. Hub: 2,65 mm

(Max. travel: 2,65 mm)

Empfohlener Hub: 2,05 mm

(Recommended travel: 2,05 mm)


Federkraft: 2,0 N bei Empfohlenem Hub

(Spring Force: 2,0 N @ recommended travel)


Bestellinformation (Order information)

Art. Nr.: UEBK-30306

(Art. No.: UEBK-30306)

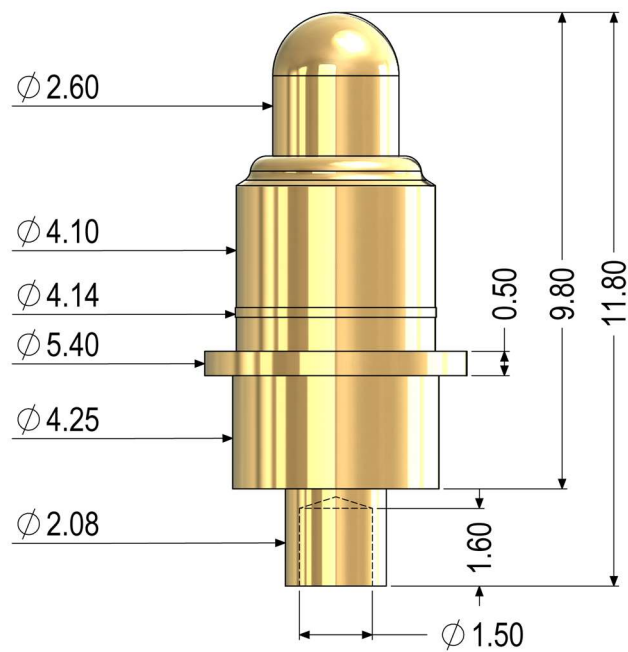

RECOMMENDED FOOTPRINT

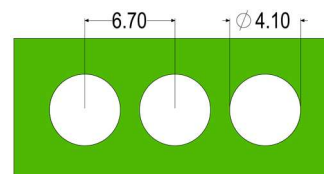

Stand 2/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)