

## Batteriekontakt / Battery Probe - UEBK-30998

### Material (Material)

Kolben: Kupfer-Beryllium, vergoldet  
(*Plunger: Copper-Beryllium, gold plated*)  
Stifthülse: Kupfer-Beryllium, vergoldet  
(*Barrel: Copper-Beryllium, gold plated*)  
Feder: Edelstahl  
(*Spring: Stainless Steel*)

### Elektrische Spezifikation (Electrical specification)


Nennstrom: 5 A  
(*Rated current: 5 A*)  
Kontaktwiderstand: < 10 mΩ  
(*Contact resistance: < 10 mΩ*)

### Mechanische Spezifikation (Mechanical specification)


Minimum Raster: 6,50 mm  
(*Minimum Centers: 6,50 mm*)  
Max. Hub: 4,00 mm  
(*Max. travel: 4,00 mm*)  
Empfohlener Hub: 3,20 mm  
(*Recommended travel: 3,20 mm*)  
Federkraft: 8 N bei empfohlenem Hub  
(*Spring Force: 8 N @ recommended travel*)

### Bestellinformation (Order information)

Art. Nr.: UEBK-30998  
(*Art. No.: UEBK-30998*)

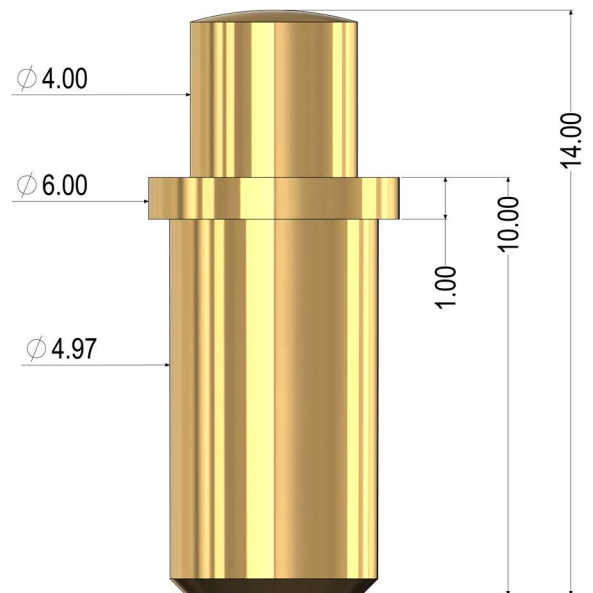

### RECOMMENDED FOOTPRINT



Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)