

## Batteriekontakt / Battery Probe - UEBK-45344

### Material (Material)

Kolben: Kupfer-Beryllium, vergoldet

*(Plunger: Copper-Beryllium, gold plated)*

Stifthülse: Messing, vergoldet

*(Barrel: Brass, gold plated)*

Feder: Edelstahl

*(Spring: Stainless Steel)*

### Elektrische Spezifikation (Electrical specification)

Nennstrom: 5 A

*(Rated current: 5 A)*

Kontaktwiderstand: < 10 mΩ

*(Contact resistance: < 10 mΩ)*

### Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 3,0 mm

*(Minimum Centers: 3,0 mm)*

Max. Hub: 1,2 mm

*(Max. travel: 1,2 mm)*

Empfohlener Hub: 1,0 mm

*(Recommended travel: 1,0 mm)*


Federkraft: 1,0 N bei Nennfederweglänge

*(Spring Force: 1,0 N @ working height)*


### Bestellinformation (Order information)

Art. Nr.: UEBK-45344

*(Art. No.: UEBK-45344)*

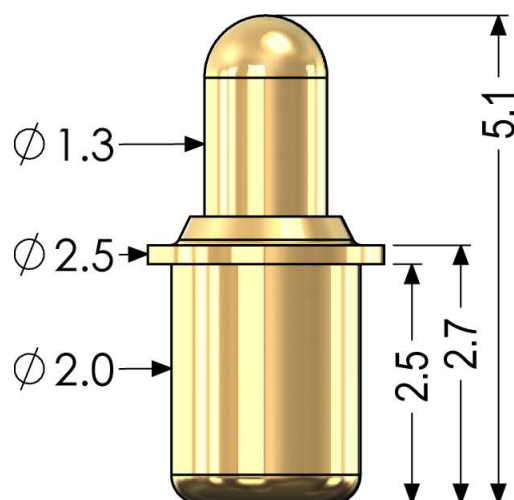

### RECOMMENDED FOOTPRINT

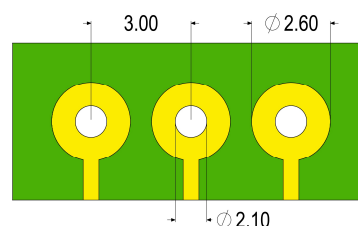

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)