

Battery Probes

Batterie Contact UEBK-12610 / 12611 / 12612 / 12613

Material

Plunger: Brass, gold plated

Barrel: Brass, gold plated

Spring: Stainless Steel

Special Features:

P/G Series: Bias plunger design

P-Series: overall length 7,20 / 10,50

G-Series: overall length 7,50 / 11,00

Recommendations: Pad size for surface Mount: 2,20

Elektrical Specification

Current rating: 10A continuous
(individual probe in free air @ ambient temperature)

Typical Resistance: <10 mΩ


Mechanical Specification

Minimum Centers: 2,54

Spring force:

0,88N @ working travel 1,0 mm / 0,71 mm for part-no. 12610 / 12612

0,82N @ working travel 2,5 mm / 2,0 mm for part-no. 12611 / 12613

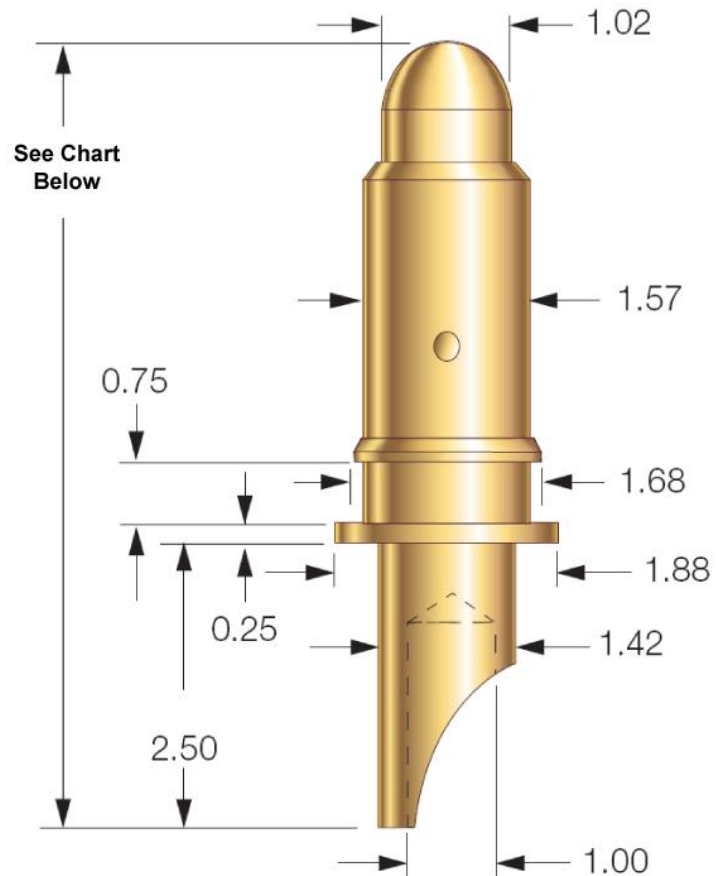

Order Information

| Part No. | Description | Series | Overall length | Working travel | Max.Travel |
|----------|-------------|--------|----------------|----------------|------------|
| 12610 | UEBK-12610 | G | 7,50 | 1,00 | 1,00 |
| 12611 | UEBK-12611 | G | 11,00 | 2,50 | 2,50 |
| 12612 | UEBK-12612 | P | 7,20 | 0,71 | 0,71 |
| 12613 | UEBK-12613 | P | 10,50 | 2,00 | 2,00 |

Specifications subject to changes without notice. Dimensions in millimeters (mm)