

Battery Probes

Batterie Contact UEBK-12622 / 12623 / 12624 / 12625

Material

Plunger: Brass, gold plated

Barrel: Brass, gold plated

Spring: Stainless Steel


Special Features:

P/G Series: Bias plunger design

P-Series: overall length 4,70 / 8,00

G-Series: overall length 5,00 / 8,50

Recommendations: Pad size for surface Mount: 2,20

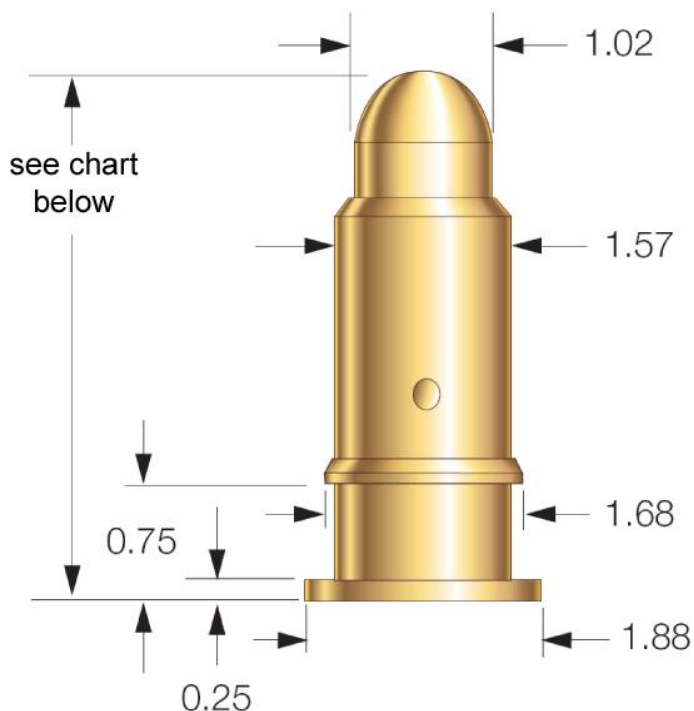

Elektrical Specification

Current rating: 10A continuous
(individual probe in free air @ ambient temperature)

Typical Resistance: <10 mΩ

Mechanical Specification

Minimum Centers: 2,54

Spring force:

0,88N @ working travel 1,0 mm / 0,71 mm for part-no. 12622 / 12624

0,82N @ working travel 2,5 mm / 2,0 mm for part-no. 12623 / 12625

Order Information

Part No.	Description	Series	Overall length	Working travel	Max.Travel
12622	UEBK-12622	G	5,00	1,00	1,00
12623	UEBK-12623	G	8,50	2,50	2,50
12624	UEBK-12624	P	4,70	0,71	0,71
12625	UEBK-12625	P	8,00	2,00	2,00

Specifications subject to changes without notice. Dimensions in millimeters (mm)