

Federkontakt / Spring Contact – UEFK-G040

Material (Material)

Kolben: gehärteter Stahl, Palladium beschichtet über Nickel (optional: Gold beschichtet über Nickel)

(Plunger: Hardened Steel, Palladium plated over Nickel (optional: Gold plated over Nickel))

Stifthülse: Phosphor Bronze, Gold beschichtet

(Barrel: Phosphor Bronze, Gold plated)

Feder: Federstahl

(Spring: Music wire)

Beschichtung der Hülse: Gold beschichtet

(Plating of Receptacle: Gold plated)

Hülse: Phosphor-Bronze / Messing

(Receptacle: Phosphor-Bronze / Brass)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 0,5 A

(Rated current: 0,5 A)

Kontaktwiderstand: < 100 mΩ

(Contact resistance: < 100 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 0,65 mm

(Minimum Centers: 0,65 mm)

Max Hub: 2,0 mm

(Max. travel: 2,0 mm)

empfohlener Hub: 1,3 mm

(Recommended travel: 1,3 mm)

Federkraft: 44 g bei Nennfederweglänge

(Spring Force: 44 g @ working height)

Federvorspannung: 18 g

(Preload force: 18 g)


Anschluss: No Term. (G040TW) / Preattached Wire (G040SW)

(Connection: No Term. (G040TW) / Preattached Wire (G040SW))

Bestellinformation (Order information)

Federkontakt (*Spring Contact*) Art No.: UEFK-G040-A / -AM

Hülse (*Receptacle*) Art No.: UEFK-G040-TW / -SW

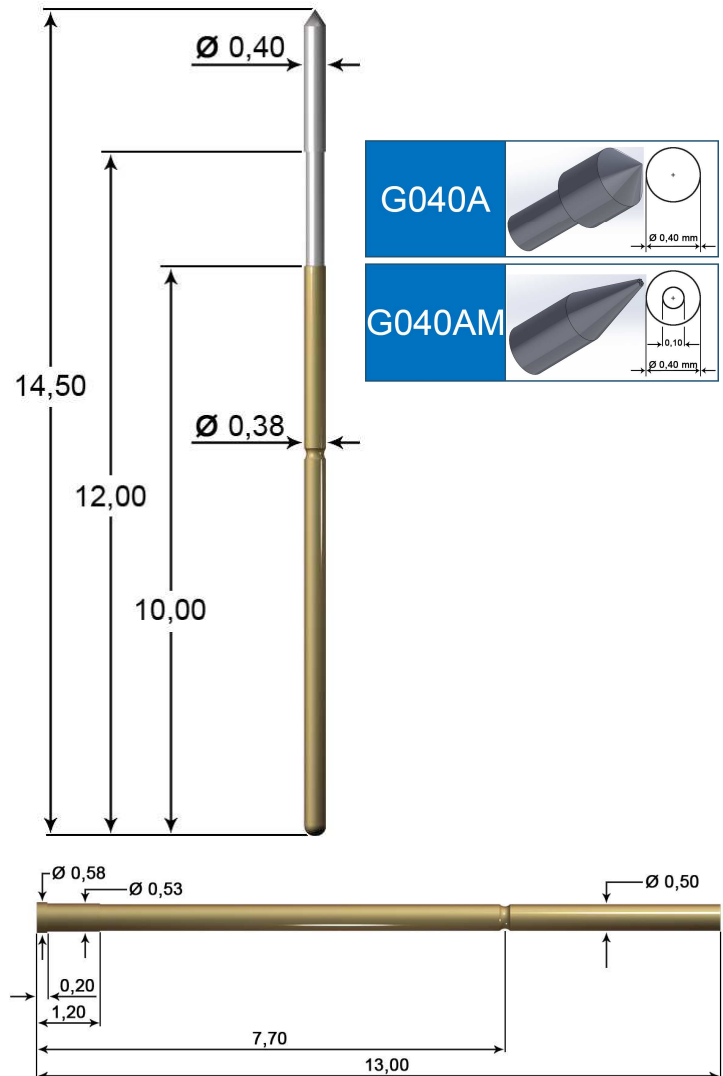

Mounting Hole Size: ~0.52 mm

G040TW - No Termination Receptacle



G040SW - Preattached Wire Receptacle



Wire AWG 30

Manufactured by **LEENO**

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter [mm] / Specifications subject to change without notice. Dimensions in Millimeter [mm]