

Federkontakt / Spring Contact – UEFK-S1353

Material (Material)

Kolben: gehärtetes Beryllium-Kupfer, Palladium beschichtet auf Nickel
(optional: Gold beschichtet auf Nickel)

(Plunger: Hardened Beryllium-Copper, Palladium plated over Nickel
(optional: Gold plated over Nickel))

Stifthülse: Nickel-Silber

(Barrel: Nickel-Silver)

Feder: Federstahl

(Spring: Music wire)

Kugel: Edelstahl, Gold beschichtet

(Ball: Stainless Steel, Gold plated)

Beschichtung der Hülse: Nickel beschichtet

(Plating of Receptacle: Nickel plated)

Hülse: Messing

(Receptacle: Brass)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 8 A

(Rated current: 8 A)

Kontaktwiderstand: < 30 mΩ

(Contact resistance: < 30 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 3,18 mm

(Minimum Centers: 3,18 mm)

Max. Hub: 11,0 mm

(Max. Travel: 11,0 mm)

empfohlener Hub: 7,3 mm

(Recommended Travel: 7,3 mm)

Federkraft: 193 g bei Nennfederweglänge

(Spring Force: 193 g @ working height)

Federvorspannung: 70 g

(Preload Force: 70 g)

Anschluss: Rundstift (S1353TW) / Wire-Wrap (S1353W)



(Connection: Round Post (S1353TW) / Wire-Wrap (S1353W))

Bestellinformation (Order information)

Federkontakt (*Spring Contact*) Art No.:

UEFK-K1353 - / -A/ -C/ -M/ -TM/ -U

Hülse (*Receptacle*) Art No.: UEFK-S1353TW / -W

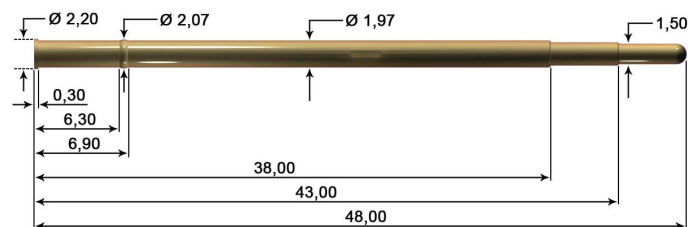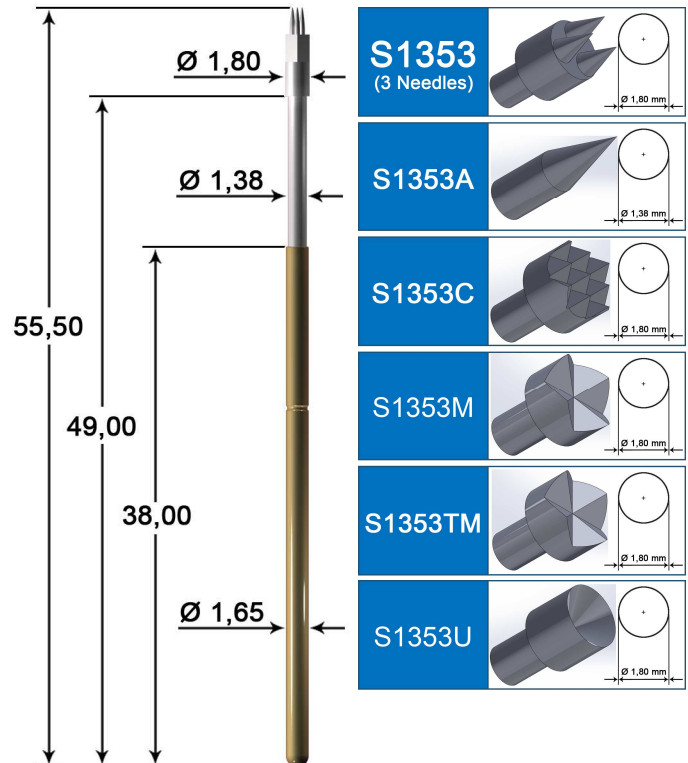

Material of Round Post: Brass, Nickel Plated

Material of Square Post: Brass, Gold Plated

Mounting Hole Size: ~2,0 mm

S1353TW - Round Post Receptacle



S1353W - Wire-Wrap Receptacle



Manufactured by **LEENO**

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter inch(mm) / Specifications subject to change without notice. Dimensions in Millimeter inch(mm)