

Federkontakt / Spring Contact – UEFK-SP-R50

Material (Material)

Kolben: gehärteter Stahl, vergoldet

(Plunger: Hardened steel, Gold plated)

Stifthülse: Phosphor Bronze, Nickel beschichtet

(Barrel: Phosphor Bronze, Nickel plated)

Feder: Federstahl

(Spring: Music wire)

Beschichtung: Messing, Nickel beschichtet

(Plating: Ni over Brass)

Hülse: Messing, Nickel beschichtet

(Receptacle: Brass, Nickel plated)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 3 A

(Rated current: 3 A)

Kontaktwiderstand: < 50 mΩ

(Contact resistance: < 50 mΩ)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 1,27 mm

(Minimum Centers: 1,27 mm)

Max Hub: 6,35 mm

(Max. travel: 6,35 mm)

empfohlener Hub: 4,23 mm

(Recommended travel: 4,23 mm)

Federkraft: 145 g bei Nennfederweglänge

(Spring Force: 145 g @ working height)

Federvorspannung: 65 g

(Preload force: 65 g)

Anschluss: Crimp (RCR50TW) / Preattached Wire (RCR50W)


(Connection: Crimp (RC50TW) / Preattached Wire (RCR50W))

Bestellinformation (Order information)


Federkontakt *(Spring Contact)* Art No.:

UEFK-SP R50 -18S/ -21S/ -33S/ -34S/ -38S


Hülse *(Receptacle)* Art No.: UEFK-RCR50TW / UEFK-RCR50W

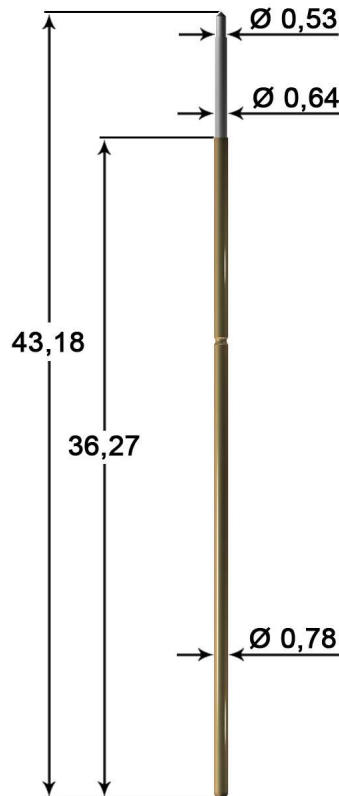


18S




21S





33S



34S



38S

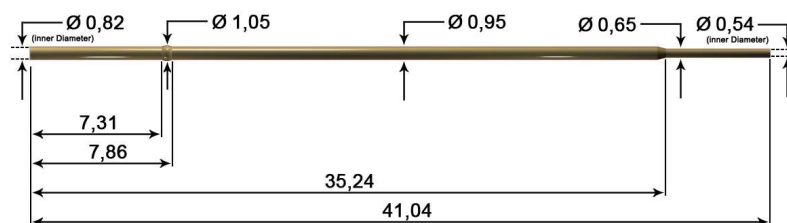

Mounting Hole Size: ~0,98 mm

R50TW - Crimp Style Receptacle



R50W - Preattached Wire Receptacle



Wire AWG 30