



S-00 DS Mounting Options

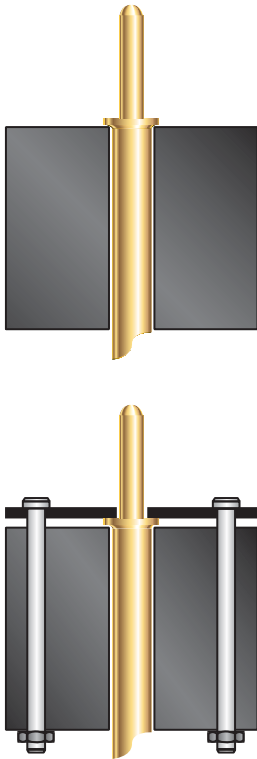

Drill Size: 0,75mm
Mounting Hole Size:
.028/.0295 (0,71/0,75)
Wire: 30 gage

DURASEAL® S-00 PROBE

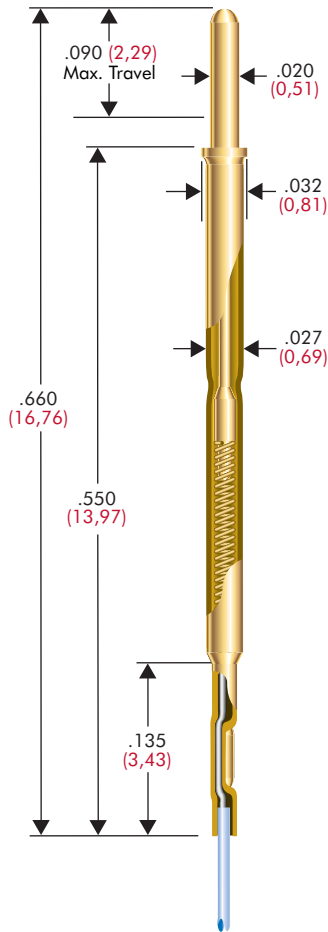

PROBE SPECIFICATIONS


Minimum Centers: .039 (0,99)
Current Rating: 3 amps continuous
Spring Force: 1.3 or 1.6 oz. @ .050 (1,27) travel
Typical Resistance : <30 mΩ
Working Travel: .050 (1,27)

Rated Force oz (gms)	Preload oz (gms)	Material
1.3 (37)	0.6 (17)	BeCu
1.6 (45)	0.7 (20)	SS

MATERIALS

Barrel: Nickel/silver, gold plated
Spring: Beryllium copper or stainless steel, gold plated
Plunger: Full-hard beryllium copper, gold plated over nickel or optional Duralloy™

BeCu PLUNGER TIPS

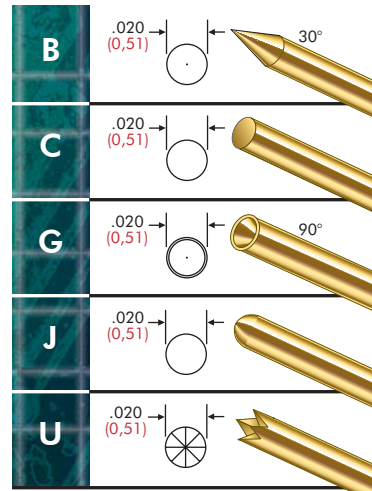

HOW TO ORDER:

SPRING CONTACT PROBE

S	00	J	1.3	G	DS	36	1
SERIES	SIZE	TIP STYLE	SPRING FORCE	PLATING OPTIONS	DURASEAL® OPTION	WIRE LENGTH	STRIP LENGTH

SPRING FORCE:
1.3 oz. @ .050 (1,27) travel
1.6 oz. @ .050 (1,27) travel

PLATING OPTIONS:
G: Gold Plated Plunger
D: Duralloy™ Plated Plunger

View updates of this information at www.idinet.com

Specifications subject to change without notice. Dimensions in inches (millimeters)