


Double Ended Probes

DE-50 PROBE

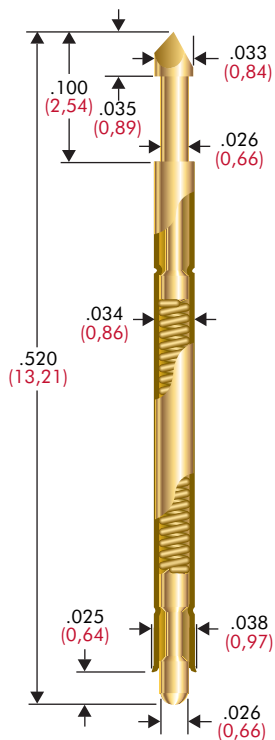

PROBE SPECIFICATIONS

Minimum Centers: .050 (1,27)
 Drill Size: #64 – .0350/.0365 (0,89/0,93)
 Current Rating: 3 amps continuous
 Spring Force: 2.0 oz. (57g) @ .050 (1,27) travel
 Typical Resistance: <50 mΩ
 Maximum Travel: .080 (2,03)
 Working Travel: .050 (1,27)


MATERIALS

Barrel: Nickel/silver, gold plated
 Spring: Music wire, gold plated
 Plunger: Full-hard beryllium copper, gold plated
 Contact: Full-hard beryllium copper, gold plated

HOW TO ORDER

DE-50-D-2-G
 DE-50-T45-2-G
 DE-50-T60-2-G
 DE-50-U-2-G

DE-100 PROBE

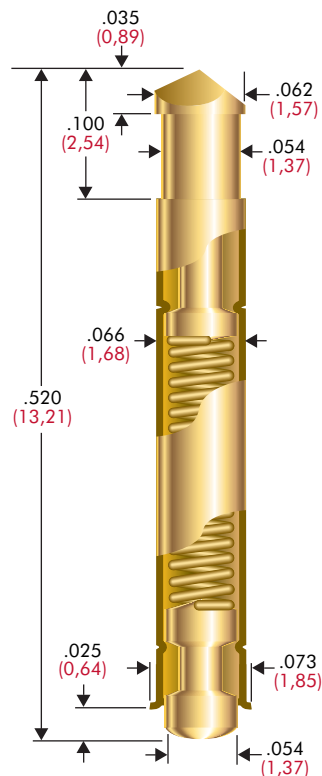

PROBE SPECIFICATIONS

Minimum Centers: .100 (2,54)
 Drill Size: 1,75mm – .067/.069 (1,70/1,75)
 Current Rating: 3 amps continuous
 Spring Force: 3.0 oz. (85g) @ .050 (1,27) travel
 Typical Resistance: <50 mΩ
 Maximum Travel: .080 (2,03)
 Working Travel: .050 (1,27)


MATERIALS

Barrel: Nickel/silver, gold plated
 Spring: Music wire, gold plated
 Plunger: Full-hard beryllium copper, gold plated
 Contact: Full-hard beryllium copper, gold plated


HOW TO ORDER

DE-100-T-3-G
 DE-100-J-3-G

DE-50 PLUNGER TIPS

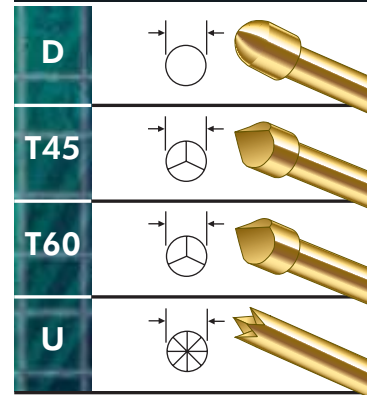

DE-100 PLUNGER TIPS

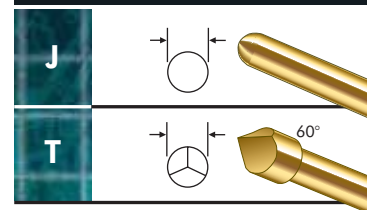

Specifications subject to change. Dimensions in inches (millimeters)