

PROBE SPECIFICATIONS


Minimum Centers: 3,18
 Current Rating: 5 amps continuous
 Spring Force: 4.0, or 7.0 oz. @ 4,32 travel
 Typical Resistance: <20 mΩ
 Working Travel: 4,32

Rated Force	Preload
9	9
113	51
198	82

MATERIALS

Barrel: Nickel/silver, gold plated
 Spring: Stainless steel, gold plated
 Plunger: Full-hard beryllium copper, gold plated over nickel or optional Nickel/silver
 Receptacle: Nickel/silver, gold plated, gold plated post

BEcu PLUNGER TIPS

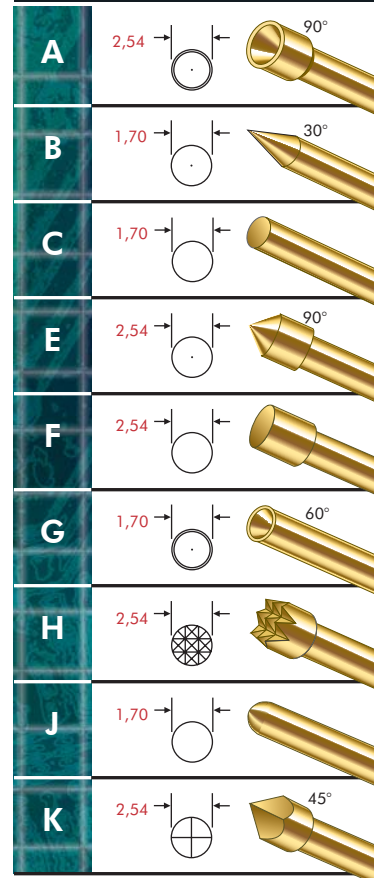

RECEPTACLE OPTIONS

Part Number	Style	Receptacle Length	Probe/Receptacle Combined Length	Comments
R-3-CR	Crimp	30,91	39,09	—
R-3-SC	Solder Cup	30,91	39,09	—
R-3-WW-429	Wire Wrap	41,81	49,99	10.9 post length - 0.64 dia.

HOW TO ORDER: SPRING CONTACT PROBE

SPRING CONTACT PROBE					RECEPTACLE			
S	3	A	4	G	R	3	WW	429
SERIES	SIZE	TIP STYLE	SPRING FORCE	PLATING OPTIONS	SERIES	SIZE	TERMINATION	POST LENGTH
SPRING FORCE: 4.0 oz. @ 4,32 travel 7.0 oz. @ 4,32 travel					TERMINATIONS: CR: Crimp SC: Solder Cup WW: Wire Wrap			
PLATING OPTIONS: G: Gold Plated Plunger D: Duralloy™ Plated Plunger					POST LENGTH: WW: 429			

Specifications subject to change without notice. Dimensions in millimeters.