
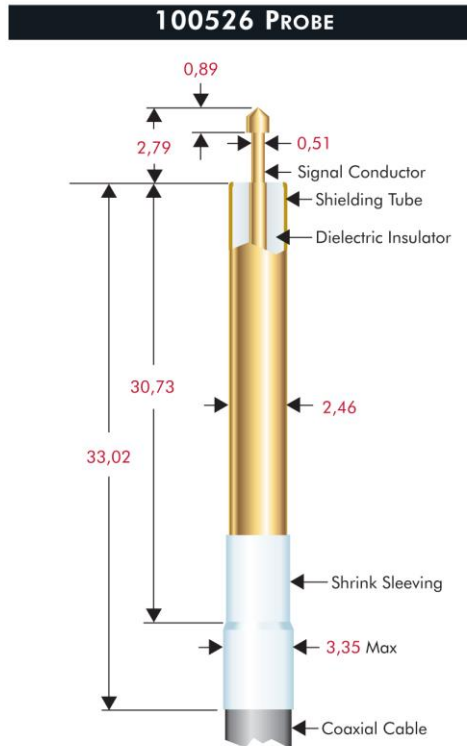


Koaxialkontakte / Coax Probes

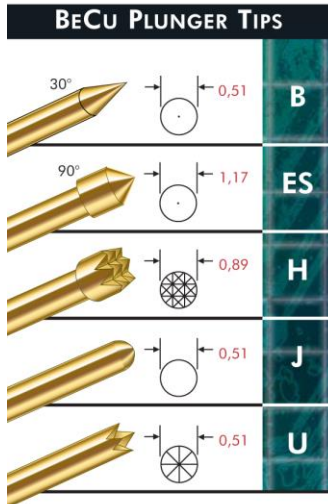

PROBE SPECIFICATIONS

Minimum Centers: 3,81
 Current Rating: 3 amps continuous
 Spring Force:
 Signal Conductor:
 1.6 oz. @ 1,78 travel for tips B, J & U
 2.0 oz. @ 1,78 travel for tips A, ES & H
 Nominal Impedance: 50 Ω
 Maximum Travel:
 2,29 for tips B, J & U
 1,91 for tips A, ES & H
 Working Travel: 1,78

MATERIALS

Spring: Beryllium copper, gold plated
 Dielectric Insulator: Teflon
 Shielding Tube: Brass, gold plated
 Signal Conductor: Series S, Size 00 probe
 Coaxial Cable: RG 316

HOW TO ORDER

100526	ES	12	AM
BASE PART NUMBER	SIGNAL PROBE TIP	CABLE LENGTH IN INCHES	TERMINATION*
			NC: No Connector AM: SMA Male AF: SMA Female

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm)
 Specifications subject to change without notice. Dimensions in Millimeter (mm)