
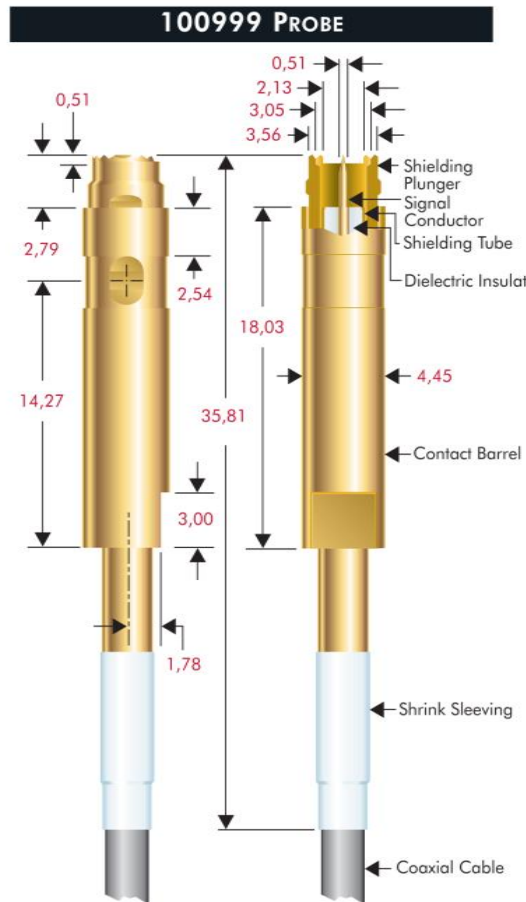


Koaxialkontakte / Coax Probes



PROBE SPECIFICATIONS

Minimum Centers: 5,08
 Current Rating: 3 amps continuous
 Spring Force:
 Signal Conductor: 2.0 oz. @ 1,78 travel
 Shielding Plunger: 4.5 oz. @ 1,78 travel
 Nominal Impedance: 50 Ω
 Maximum Travel: 2,29
 Working Travel: 1,78

MATERIALS

Barrel: Brass, gold plated
 Spring:
 Signal Conductor: Beryllium copper, gold plated
 Shielding Plunger: Stainless steel, gold plated
 Shielding Plunger: Beryllium copper, gold plated
 Dielectric Insulator: Teflon
 Shielding Tube: Brass, gold plated
 Signal Conductor: Series S, Size 00 probe
 Coaxial Cable: Semi-flex or flex cable

HOW TO ORDER

100999	B	12	AM	F
BASE PART NUMBER	SIGNAL PROBE TIP	CABLE LENGTH IN INCHES	TERMINATIONS*	CABLE TYPE
			NC: No Connector AM: SMA Male AF: SMA Female	F: Flex S: Semi-Flex

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm)
 Specifications subject to change without notice. Dimensions in Millimeter (mm)