


Temperaturmanagement




Peltierelement / Peltier Module UEPT-140-127-060C200S

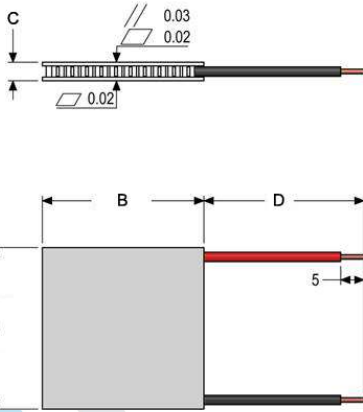


Maße / Dimensions:

A	B	C	D
39,7	39,7	4,16 ± 0,025	133


Heat Pumped vs. Current

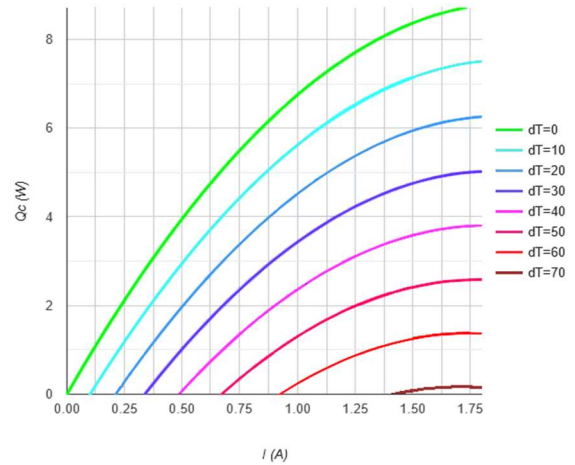


Heat Rejected vs. Current

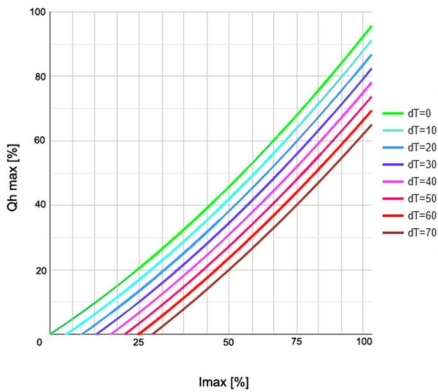

Voltage vs. Current

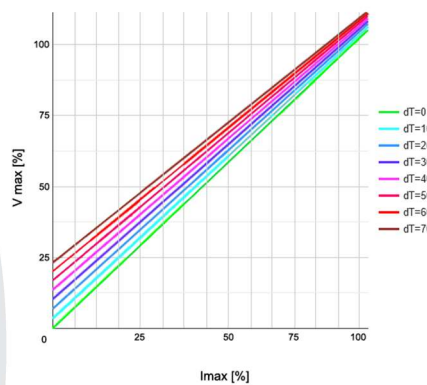

Performance vs. Current

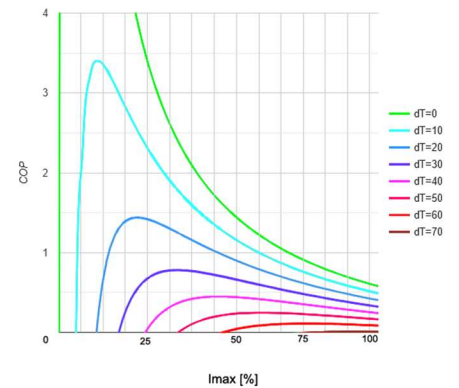

Elektrische Spezifikation (Electrical Specification)

Spannung (Umax): 17,5 V
(Voltage (Umax)): 17,5 V
Strom (Imax): 6 A
(Current (Imax)): 6 A
Innenwiderstand (Rac): 1,73 Ohm
Internal resistance (Rac): 1,73 Ohm

Thermische Spezifikationen (Thermal specification)

Wärmeleistung (Qc max): 57 W
(Heat output (Qc max)): 57 W
Betriebstemperatur (Tmax): 170 °C
(Operating temperature (Tmax)): 170 °C
Max: ΔT: 72K
Max: ΔT: 72K

Merkmale (Features)

Anschlussleitung: AWG20
(Connecting cable: AWG20)
Versiegelung: Silikon
(Sealing: silicone)
RoHS konform: Ja
(RoHS compliant: yes)

Bestellinformation (Order Information)

Art. Nr.: 92080
(Part No.: 92080)
Bestellbezeichnung: UEPT-140-127-060C200S
(Order designation: UEPT-140-127-060C200S)
Optional: Unterschiedliche Kabellängen auf Anfrage
(Optional: Different cable lengths on request)