

Batteriekontakt / Battery Probe - UEBK-13301

Material (Material)

Kolben: Kupferlegierung, vergoldet

(Plunger: Copper alloy, gold plated)

Stifthülse: Kupferlegierung, vergoldet

(Barrel: Copper alloy, gold plated)

Feder: Edelstahl

(Spring: Stainless Steel)

Elektrische Spezifikation (Electrical specification)

Nennstrom: 9 A

(Rated current: 9 A)

Kontaktwiderstand: < 20 m Ω

(Contact resistance: < 20 m Ω)

Mechanische Spezifikation (Mechanical specification)

Minimum Raster: 5,60 mm

(Minimum Centers: 5,60 mm)

Max Hub: 2,03 mm

(Max. travel: 2,03 mm)

Empfohlener Hub: 1,33 mm

(Recommended travel: 1,33 mm)


Federkraft: 1,0 N bei Empfohlenem Hub

(Spring Force: 1,0 N @ recommended travel)


Bestellinformation (Order information)

Art. Nr.: UEBK-13301

(Art. No.: UEBK-13301)

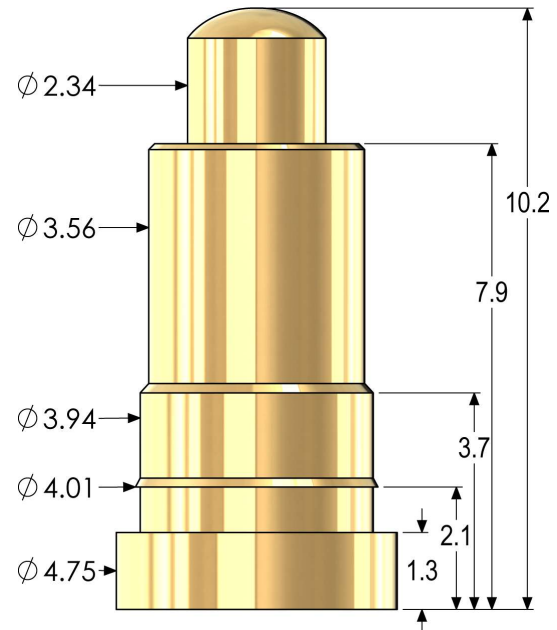

RECOMMENDED FOOTPRINT

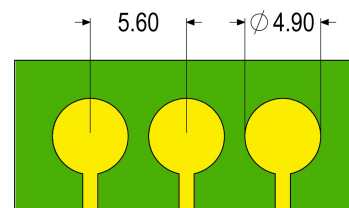

Stand 1/2021

Änderungen und Irrtümer vorbehalten. Angaben in Millimeter (mm) / Specifications subject to change without notice. Dimensions in Millimeter (mm)